

08-30-00

A

08/29/00
JC960 U.S. PRO

PATENT

Docket No. 1232-4642

Express Mail Label No. EL020890822US

156659/60
JC903 U.S. PRO
08/29/00

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

UTILITY APPLICATION AND APPLICATION FEE TRANSMITTAL (1.53(b))

ASSISTANT COMMISSIONER FOR PATENTS

Box Patent Application
Washington, D.C. 20231

Sir:

Transmitted herewith for filing is the patent application of

Named Inventor(s) and

Address(es): Hirofumi TAKEI, 18-30-302, Takatahigashi 4-chome, Kohoku-ku, Yokohama-shi,
Kanagawa-ken, Japan

For:

FOCUSING DEVICE AND METHOD

Enclosed are:

☒ 36 page(s) of specification, 1 page(s) of Abstract, 2 Page(s) of claims☒ 22 sheets of drawing ☒ formal ☐ informal☐ Page(s) of Declaration and Power of Attorney☐ Unsigned☐ Newly Executed☐ Copy from prior application☐ Deletion of inventors including Signed Statement under 37 C.F.R. § 1.63(d)(2)☒ Incorporation by Reference: The entire disclosure of the priority application(s) identified below, is considered as being part of the disclosure of the accompanying application and is incorporated herein by reference.☐ Microfiche Computer Program (Appendix)☐ page(s) of Sequence Listing☐ computer readable disk containing Sequence Listing☐ Statement under 37 C.F.R. § 1.821(f) that computer and paper copies of the Sequence Listing are the same☒ Claim for Priority Japanese Application No 11-245721 filed 8/31/99☐ Certified copy of Priority Document(s)

08/29/00 156659/60 JC903 U.S. PRO

- ☐ English translation documents
- ☐ Information Disclosure Statement
- ☐ Copy of 1 Cited reference
- ☐ Copy of PTO-1449 filed in parent application serial No. _____.
- ☐ Preliminary Amendment
- ☒ Return receipt postcard (MPEP 503)
- ☐ Assignment Papers (assignment cover sheet and assignment documents)
- ☐ A check in the amount of \$40.00 for recording the Assignment.
- ☐ Assignment papers filed in parent application Serial No. _____.
- ☐ Certification of chain of title pursuant to 37 C.F.R. § 3.73(b).
- ☐ This is a ☐ continuation ☐ divisional ☐ continuation-in-part (C-I-P) of prior application serial no. _____.
- ☐ Cancel in this application original claims _____ of the parent application before calculating the filing fee. (At least one original independent claim must be retained for filing purposes.)
- ☐ A preliminary Amendment is enclosed. (Claims added by this Amendment have been properly numbered consecutively beginning with the number following the highest numbered original claim in the prior application.
- ☐ The status of the parent application is as follows:
- ☐ A Petition For Extension of Time and a Fee therefor has been or is being filed in the parent application to extend the term for action in the parent application until _____.
- ☐ A copy of the Petition for Extension of Time in the co-pending parent application is attached.
- ☐ No Petition For Extension of Time and Fee therefor are necessary in the co-pending parent application.
- ☐ Please abandon the parent application at a time while the parent application is pending or at a time when the petition for extension of time in that application is granted and while this application is pending has been granted a filing date, so as to make this application co-pending.
- ☐ Transfer the drawing(s) from the patent application to this application.
- ☐ Amend the specification by inserting before the first line the sentence:
This is a ☐ continuation ☐ divisional ☐ continuation-in-part of co-pending application Serial No. _____ filed _____.

I. CALCULATION OF APPLICATION FEE (For Other Than A Small Entity)

	Basic Fee			
	Number Filed		Number Extra	Rate
Total Claims	33	-20=	13	x\$18.00
Independent Claims	6	-3=	3	x78.00
Multiple Dependent Claims				
	[] yes		Additional Fee =	
	[X] no		Add'l Fee = 260.00	
			NONE	\$.0

Total: \$1,158.00

- [] A statement claiming small entity status is attached or has been filed in the above-identified parent application and its benefit under 37 C.F.R. § 1.28(a) is hereby claimed. Reduced fees under 37 C.F.R. § 1.9(F) (50% of total) paid herewith \$ _____.
- [X] A check in the amount of \$1,158.00 for payment of the application filing fees is attached.
- [] Charge Fee(s) to Deposit Account No. 13-4500. Order No. _____. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.
- [X] The Assistant Commissioner is hereby authorized to charge any additional fees which may be required for filing this application, or credit any overpayment to Deposit Account No. 13-4500, Order No. 1232-4642. A DUPLICATE COPY OF THIS SHEET IS ATTACHED.

Respectfully submitted,

MORGAN & FINNEGAN, L.L.P.

By: Stephen J. Manetta
Registration No 40,426Dated: August 29, 2000

CORRESPONDENCE ADDRESS
 MORGAN & FINNEGAN, L.L.P.
 345 Park Avenue
 New York, New York 10154
 (212) 758-4800
 (212) 751-6849 Facsimile

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicants : Hirofumi TAKEI
Serial No. : To Be Assigned Examiner: To Be Assigned
Filed : August 29, 2000 (Herewith) Group Art Unit: TBA
For : FOCUSING DEVICE AND METHOD

EXPRESS MAIL CERTIFICATE

Express Mail Label No. EL020890822US

Date of Deposit August 29, 2000


I hereby certify that the following attached paper(s) and/or fee
Application Fee Transmittal (in duplicate); 36 pp. of specs., 1 page of abstract, 7 pp. claims (33 TOTAL
claims); 22 Sheets of Formal Drawings (Figs. 1-22B); Check in the amount of \$1,158.00; and return receipt
postcard

is being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37

C.F.R. §1.10 on the date indicated above and is addressed to the Commissioner for Patents, Box New Applications,
Washington, D.C. 20231.

Francisco J. Garcia

Typed or printed name of person
mailing paper(s) and/or fee)



(Signature of person mailing
paper(s) and/or fee)

CORRESPONDENCE ADDRESS:
MORGAN & FINNEGAN, L.L.P.
345 Park Avenue
New York, New York 10154
(212) 758-4800
(212) 751-6849 Facsimile

TITLE OF THE INVENTION
FOCUSING DEVICE AND METHOD

FIELD OF THE INVENTION

5 The present invention relates to a focusing
device and method and, more particularly, to a focusing
device and method, which are used in an image sensing
apparatus such as a video camera, digital still camera,
or the like, for setting an appropriate in-focus state.

10

BACKGROUND OF THE INVENTION

As a conventional automatic focus adjustment
operation used in a video equipment such as a video
camera or the like, a so-called "hill-climbing
15 operation" is known. In this operation, a
high-frequency component in an image signal obtained
from an image sensing element such as a CCD is
extracted, and focus adjustment is done by driving a
focusing lens to maximize the high-frequency component.
20 Since the focus adjustment system based on this
"hill-climbing operation" makes focus detection based
on the sharpness of an object image, it can accurately
adjust the focus irrespective of the object distance,
i.e., even when an object is located at a far or
25 closest distance position.

00649951.002900

As conventional auto-focusing (to be abbreviated to "AF" hereinafter) based on the hill-climbing operation, an integration AF method that integrates, within a predetermined distance measurement range of a frame, image signal components which have undergone a high-pass filter process for extracting a high-frequency component and uses an integrated signal in focusing control is prevalently used. Since the integration AF method integrates extracted high-frequency components within the distance measurement range and uses the integrated signal, it is excellent in AF stability, and can easily obtain an optimal in-focus point.

Fig. 14 is a block diagram showing an arrangement of a video camera system adopting the conventional integration AF method.

Referring to Fig. 14, reference numeral 101 denotes a stationary first lens group; 102, a zoom lens for zooming; 103, an iris for adjusting the quantity of light; and 104, a stationary second lens group. Reference numeral 105 denotes a focus compensation lens (to be referred to as a "focus lens" hereinafter) which has a function of compensating for movement of a focal plane upon zooming, and a focus adjustment function.

Reference numeral 106 denotes a CCD as an image sensing element. Reference numeral 107 denotes a

CDS/AGC which performs sample-and-hold operation and amplifies the output from the CCD 106, and the gain of which is adjusted by a signal from a camera controller (microcomputer) 114 to be described later. Reference
 5 numeral 108 denotes an A/D converter for converting an analog signal from the CDS/AGC 107 into a digital signal; and 109, a camera signal processing circuit. The output signal from the camera signal processing circuit 109 is recorded on a recording medium such as a
 10 magnetic tape, memory, or the like (not shown).

Reference numeral 110 denotes a timing signal generator for supplying various drive pulses and timing pulses to the respective sections of the camera, such as the CCD 106, CDS/AGC 107, and the like.

15 Reference numeral 111 denotes a zoom lens driver for driving the zoom lens 102; 112, an iris driver for driving the iris 103; and 113, a focus lens driver for driving the focus lens 105. The drivers 111 to 113 respectively drive motors included therein in
 20 accordance with signals from the camera controller 114.

Reference numeral 120 denotes a focus evaluation value processor, which has a high-pass filter 121 for extracting a predetermined high-frequency component from a luminance signal output from the A/D converter
 25 108, a distance measurement range gate 122 for extracting only signal components within a

predetermined distance measurement range from a frame,
a line peak hold circuit 123 for holding peaks of the
signal components extracted by the distance measurement
range gate 122 in units of horizontal scan lines, and
5 an integrator 124 for integrating peak values of the
peak-held scan lines. The integrated value is called
an "integrated focus evaluation value".

The value of the integrator 124 is reset for each
frame, and the integrator 124 can compute the
10 integrated focus evaluation value for each frame. The
integrated focus evaluation value is input to the
camera controller 114, which drives the focus lens 105
via the focus lens driver 113 to maximize the
integrated focus evaluation value.

15 In the prior art, the peak values of the
peak-held scan lines are integrated. Alternatively,
the signal components may be integrated without holding
peaks, or peak values may be held in units of a
plurality of horizontal scan lines, and the held values
20 may be integrated.

The output luminance signal from the A/D
converter 108 is also input to an exposure evaluation
value processor 130, which generates an evaluation
value for controlling exposure from signal components
25 of a frame and supplies it to the camera controller 114.
The camera controller 114 drives the iris 103 based on

00649951.082900

the exposure evaluation value to obtain an optimal exposure value. A key unit 115 is connected to the camera controller 114, and various kinds of key operation information of the camera unit such as a zoom

5 key for operating the zoom lens 102 and the like are output to the camera controller 114. For example, when the user has pressed the zoom key, the camera controller 114 drives the zoom lens 102 via the zoom lens driver 111 to obtain a desired zoom ratio (focal

10 length).

However, since the integration AF method controls to obtain the highest average contrast within a frame, although no problem is posed for a normal object focusing performance impairs for an image of a

15 high-luminance object or a point light source in a night scene (to be referred to as a "peak image" hereinafter).

Fig. 15 shows an example of the integrated focus evaluation value of a normal object, and Fig. 16 shows

20 an example of the integrated focus evaluation value of a peak image. In the normal object, since an in-focus point and a peak value of the integrated focus evaluation value appear at an identical position P0, as shown in Fig. 15, and no problem is posed. However, in

25 the peak image, an in-focus point and a peak of the integrated focus evaluation value do not appear at the

same position, and the peak of the integrated focus evaluation value appears at a slightly offset focus lens position PB, as shown in Fig. 16.

In case of an image of a point light source in a night scene as a typical peak image, the integrated focus evaluation value assumes a larger value in an out-of-focus state shown in Fig. 18 than a perfect in-focus state shown in Fig. 17. Note that Figs. 17 and 18 show examples of images that appear on the frame upon sensing a peak image. In this manner, a peak of the integrated focus evaluation value appears at a focus lens position offset from an actual in-focus point. In such case, since the camera controller 114 controls the focus lens 105 to a position where the integrated focus evaluation value has a peak, the focus lens 105 is controlled to the focus lens position PB shown in Fig. 16. As a result, the obtained image is out of focus.

As an alternative to the integration AF method, a peak AF method that uses a maximum peak value within a predetermined distance measurement range from luminance signal components of a frame that has undergone a high-pass filter process for extracting high-frequency components is known. Fig. 19 is a block diagram showing the arrangement of a video camera system that adopts the conventional peak AF method.

0064951, 002900
006280, 1364950

The video camera shown in Fig. 19 has substantially the same arrangement as that of the video camera shown in Fig. 14, except that the arrangement of the focus evaluation value processor 120 is modified to obtain the maximum value of high-frequency components of the luminance signal within the distance measurement range. Referring to Fig. 19, the maximum value of high-frequency components of the luminance signal within the distance measurement range, which is output from a focus evaluation value processor 120' is called a "peak focus evaluation value".

Fig. 20 shows a peak focus evaluation value in a peak image which is hard to focus upon adjustment by integration AF. For the purpose of comparison with integration AF, Fig. 20 also shows the integrated focus evaluation value. As can be seen from Fig. 20, the peak focus evaluation value becomes maximal at a correct in-focus point even in a peak image. Figs. 21A and 21B respectively show a luminance signal for one horizontal line of a portion indicated by LA in Fig. 17, and the output of a high-pass filter of an in-focus image of a point light source. Figs. 22A and 22B respectively show a luminance signal for one horizontal line of a portion indicated by LB in Fig. 18, and the output of a high-pass filter of an out-of-focus image of a point light source.

00549051-032900

comprising: (A) a photo-receiving device for receiving light from an object and converting it into an electrical signal; and (B) a focus adjusting device for forming a first adjustment signal by performing a

5 predetermined integration operation on a predetermined frequency component of an image signal obtained by the photo-receiving device and forming a second focus adjustment signal, different from the first focus adjustment signal, from a peak value of a predetermined

10 frequency component of the image signal obtained by the photo-receiving device, wherein the focus adjustment apparatus applies at least one of the first and second focus adjustment signals to focus adjustment on the basis of a luminous state of the object.

15 Further, the foregoing object is also attained by providing an apparatus comprising: (A) a photo-receiving device for receiving light from an object; and (B) a focus adjusting device performing an operation for focus adjustment, wherein the focus

20 adjusting device performs the operation depending upon determination whether or not an object image has a luminous state judged as a peak image from a photo-received signal on the basis of the photo-receiving device.

25 Furthermore, the foregoing object is also attained by providing a focus adjusting method

comprising: converting light from an object into an image signal, forming a first adjustment signal by performing a predetermined integration operation on a predetermined frequency component of the image signal, 5 forming a second focus adjustment signal, different from the first focus adjustment signal, from a peak value of a predetermined frequency component of the image signal, applying at least one of the first and second focus adjustment signal to focus adjustment on 10 the basis of a luminous state of the object.

Further, foregoing object is also attained by providing a focus adjusting method comprising: performing an operation for focus adjustment depending upon determination whether or not an object image has a 15 luminous state judged as a peak image on the basis of a photo-received signal of light of the object.

Further, foregoing object is also attained by providing a computer program product comprising: converting light from an object into an image signal, 20 forming a first adjustment signal by performing a predetermined integration operation on a predetermined frequency component of the image signal, forming a second focus adjustment signal, different from the first focus adjustment signal, from a peak value of a predetermined frequency component of the image signal, 25 applying at least one of the first and second focus

adjustment signal to focus adjustment on the basis of a
luminous state of the object.

Further, foregoing object is also attained by A
computer program product comprising: performing an
5 operation for focus adjustment depending upon
determination whether or not an object image has a
luminous state judged as a peak image on the basis of a
photo-received signal of light of the object.

Other features and advantages of the present
10 invention will be apparent from the following
description taken in conjunction with the accompanying
drawings, in which like reference characters designate
the same or similar parts throughout the figures
thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

The accompanying drawings, which are incorporated
in and constitute a part of the specification,
illustrate embodiments of the invention and, together
20 with the description, serve to explain the principles
of the invention.

Fig. 1 is a block diagram showing an arrangement
of a video camera system that adopts a focus adjustment
method according to a first embodiment of the present
25 invention;

Fig. 2 is a flow chart showing a focus adjustment control sequence executed by a camera controller according to the first embodiment of the present invention,;

- 5 Fig. 3 is a graph for explaining a peak image discrimination scheme according to the first embodiment of the present invention;

- 10 Fig. 4 is a flow chart showing a focus adjustment control sequence according to the second embodiment of the present invention;

Fig. 5 is a graph for explaining a peak image discrimination scheme according to the second embodiment of the present invention;

- 15 Fig. 6 is a flow chart showing a focus adjustment control sequence according to the third embodiment of the present invention;

Fig. 7 is a graph for explaining a peak image discrimination scheme according to the third embodiment of the present invention;

- 20 Fig. 8 is a block diagram showing an arrangement of a video camera system that adopts a focus adjustment method according to the fourth embodiment of the present invention;

- 25 Fig. 9 is a graph showing the relationship between the field depth and integrated focus evaluation value in a peak image;

Fig. 10 is a flow chart showing a focus adjustment control sequence according to the fourth embodiment of the present invention;

Fig. 11 is graph for explaining a peak image discrimination scheme according to the fourth embodiment of the present invention;

Fig. 12 is a flow chart showing a focus adjustment control sequence according to the fifth embodiment of the present invention;

Figs. 13A and 13B are graphs for explaining a peak image discrimination scheme according to the fifth embodiment of the present invention;

Fig. 14 is a block diagram showing an arrangement of a video camera system that adopts the conventional integration AF method;

Fig. 15 is a graph showing an example of an integrated focus evaluation value in a normal object;

Fig. 16 is a graph showing an example of an integrated focus evaluation value in a peak image;

Fig. 17 is a view showing an example of an image that appears on a frame upon sensing a peak image;

Fig. 18 is a view showing an example of an image that appears on a frame upon sensing a peak image;

Fig. 19 is a block diagram showing an arrangement of a video camera system that adopts the conventional peak AF method;

Fig. 20 is a graph showing an example of a peak focus evaluation value in a peak image;

Figs. 21A and 21B are graphs respectively showing the luminance signal for one horizontal line, and the output from a high-pass filter; and

Figs. 22A and 22B are graphs respectively showing the luminance signal for one horizontal line, and the output from a high-pass filter.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Preferred embodiments of the present invention will be described in detail in accordance with the accompanying drawings.

[First Embodiment]

The first embodiment of the present invention will be described first with reference to Figs. 1 to 3.

Fig. 1 is a block diagram showing an arrangement of a video camera system that adopts a focus adjustment method according to the first embodiment. The same reference numeral in Fig. 1 denote the same parts as in the arrangement of the conventional video camera system shown in Fig. 14, and a detailed description thereof will be omitted. A characteristic feature of the video camera system in the first embodiment lies in operations of a focus evaluation value processor 220 capable of outputting an integrated focus evaluation

value and peak focus evaluation value, an exposure evaluation value processor 230 capable of outputting the average and peak luminance values of a frame, and a camera controller 240 which receives these values.

- 5 A luminance signal which is output from an A/D converter 108 and input to the focus evaluation value processor 220 undergoes a process for extracting a predetermined high-frequency component from the luminance signal by a high-pass filter 221. Then, a
- 10 distance measurement range gate 222 executes a process for extracting only signal components within a predetermined distance measurement range from a frame. A line peak hold circuit 223 holds peaks of the extracted signal components in units of horizontal scan
- 15 lines. An integrator 224 integrates peak values in units of scan lines within the distance measurement range, and outputs an integrated focus evaluation value. The output from the distance measurement range gate 222 is also input to a peak hold circuit 225 to extract the
- 20 maximum high-frequency component within the distance measurement range. This value is called a peak focus evaluation value. The values of the integrator and peak hold circuit are reset for each frame, and the integrated focus evaluation value and peak focus
- 25 evaluation value for each frame can be output to the camera controller 240.

00649051.002900

The exposure evaluation value processor 230 executes a process for extracting only a signal within a predetermined photometry range from a frame using a photometry range gate 231 with respect to the luminance signal input from the A/D converter 108. The luminance signal extracted by the photometry range gate 231 is input to an integrator 232, which outputs an average luminance signal obtained by summing up and averaging luminance signal components in the photometry range to the camera controller 240. Also, the luminance signal extracted by the photometry range gate 231 is input to a peak hold circuit 233, which outputs a maximum luminance signal within the photometry range to the camera controller 240.

15 Fig. 2 is a flow chart showing the AF focus adjustment control sequence executed by the camera controller 240 using these input signals.

An average luminance value Y_{avr} and peak luminance value Y_{peak} are read (step S200), and it is checked if the peak luminance value Y_{peak} is higher than a predetermined value Y_{th1} (step S201). If the peak luminance value Y_{peak} is lower than the predetermined value Y_{th1} , the object is unlikely to be a high-luminance object or point light source, and it is determined that the object is a normal image. Hence, a process for reading the integrated focus evaluation

value output from the integrator 224 is executed (step S210).

On the other hand, if it is determined in step S201 that the peak luminance value Y_{peak} is higher than the predetermined value Y_{th1} , it is checked if the average luminance value Y_{avr} output from the integrator 232 is very low, i.e., if the average luminance value Y_{avr} is lower than a predetermined value Y_{th2} (step S202). If average luminance value Y_{avr} is lower than the predetermined value Y_{th2} , since it is determined that the object is a peak image (night scene or the like), a process for reading a peak focus evaluation value output from the peak hold circuit 225 is executed (step S220). Fig. 3 is an explanatory view showing an example of a peak image discrimination scheme based on the average luminance value Y_{avr} and peak luminance value Y_{peak} . A condition that the peak luminance value Y_{peak} is not low in step S201 and the average luminance value Y_{avr} is very low in step S202 corresponds to region 1 shown in Fig. 3.

If it is determined in step S202 that the average luminance value Y_{avr} is not lower than the predetermined value Y_{th2} , it is checked if the peak luminance value Y_{peak} is very high, i.e., it is higher than a predetermined value Y_{th3} ($Y_{th3} > Y_{th1}$) (step S203). If the peak luminance value Y_{peak} is higher

00649951 0623500
0056230* 15564960

than the predetermined value Y_{th3} , it is checked if the average luminance value Y_{avr} is lower than a predetermined value Y_{th4} ($Y_{th4} > Y_{th2}$) (step S204).

If it is determined in step S204 that the average
5 luminance value Y_{avr} is lower than the predetermined value Y_{th4} , i.e., if the peak luminance value Y_{peak} is very high and the average luminance value Y_{avr} is low to some extent, it is determined that the object is a peak image such as an image of sunbeams coming through
10 branches of trees or the like, and the process for reading a peak focus evaluation value is executed in step S220. This condition corresponds to region 2 shown in Fig. 3.

When the object does not satisfy the condition of
15 region 1 or 2, i.e., if the peak luminance value Y_{peak} is low (NO in step S201 or S203) or both the average luminance value Y_{avr} and peak luminance value Y_{peak} are high (NO in step S204), it is determined that the object is a normal image, and the process for reading
20 the integrated focus evaluation value is executed in step S210. The condition of the normal image corresponds to region 3 in Fig. 3.

It is checked based on the average luminance value Y_{avr} and peak luminance value Y_{peak} in the
25 aforementioned sequence if the object is a peak or normal image. If it is determined that the object is a

normal image, an AF process is done using the integrated focus evaluation value; otherwise, an AF process is done using a peak focus evaluation value (step S230).

5 In this manner, in case of an object such as a night scene, point light source, or the like (peak image) that poses a problem in the conventional integration AF method, correct focus adjustment control can be done using the peak focus evaluation value. In
10 case of a normal image, since focus adjustment control is done based on the integrated focus evaluation value, stable focus adjustment can be made.

 Since an object is discriminated in this manner, and AF control optimal to each object is done, a system
15 which has merits of both the integration and peak AF methods can be implemented. That is, according to the first embodiment, correct focus adjustment can be done not only in a normal image but also in a peak image.
[Second Embodiment]

20 The second embodiment of the present invention will be described below with reference to Figs. 4 and 5.

 The second embodiment is characterized in that a peak image is discriminated based on a luminance signal using a scheme different from that in the first
25 embodiment.

00649951-002900

Fig. 4 is a flow chart showing the focus adjustment control sequence according to the second embodiment of the present invention, and Fig. 5 is an explanatory view showing the peak image discrimination scheme. In Fig. 4, the sequence in step S200 and steps S210 to S230 is the same as those in Fig. 2.

An average luminance value Y_{avr} and peak luminance value Y_{peak} are read in step S200, and it is checked in step S201B if the peak luminance value Y_{peak} and average luminance value Y_{avr} satisfy:

$$Y_{peak} > K1 \times Y_{avr} + Y_{th5} \quad \dots(1)$$

where the coefficient $K1$ is the ratio between the peak luminance value Y_{peak} and average luminance value Y_{avr} , and corresponds to the slope of a straight line $L1$ in Fig. 5. Also, the predetermined value Y_{th5} is an offset of the straight line $L1$, and corresponds to Y_{th5} in Fig. 5. In the second embodiment, if the peak luminance value is expressed by 8-bit data, since the maximum level is 255, the slope $K1$ is given by:

$$K1 = (255 - Y_{th5})/Y_{th6} \quad \dots(2)$$

The relationship that satisfies this condition corresponds to a peak image region shown in Fig. 5. An object within this region undergoes an AF process using a peak focus evaluation value. On the other hand, if this condition is not satisfied, it is determined that

the object is a normal image, and an AF process is done using an integrated focus evaluation value.

As described above, according to the second embodiment, since the peak focus evaluation value is used in focus adjustment control for an object such as a night scene, point light source, or the like (peak image) that poses a problem in the conventional integration AF method, accurate focus adjustment is done even in a peak image. Since the integrated focus evaluation value is used in focus adjustment control for a normal image, stable focus adjustment can be assured.

[Third Embodiment]

The third embodiment of the present invention will be described below with reference to Figs. 6 and 7.

The third embodiment is characterized in that a peak image is discriminated based on a luminance signal using a scheme different from that in the first and second embodiments.

The third embodiment uses the ratio between the average luminance value Y_{avr} and peak luminance value Y_{peak} and offset as conditions as in the second embodiment, but is different from the scheme of the second embodiment in that a plurality of ratios are used.

Fig. 6 is a flow chart showing the focus adjustment control sequence according to this embodiment, and Fig. 7 is an explanatory view showing the peak image discrimination method. Step S200 and
5 steps S210 to S230 in Fig. 6 are the same as those shown in Fig. 2 explained in the first embodiment.

When an average luminance value Y_{avr} and peak luminance value Y_{peak} are read, it is checked if these average luminance value Y_{avr} and peak luminance value
10 Y_{peak} satisfy a first condition:

$$Y_{peak} > K2 \times Y_{avr} + Y_{th7} \quad \dots (3)$$

that is, if luminance data falls within a peak image region shown in Fig. 7 (step S201C). In inequality (3), the coefficient $K2$ is the ratio between the average
15 luminance value Y_{avr} and peak luminance value Y_{peak} , and corresponds to the slope of a straight line $L2$ in Fig. 7. Also, the predetermined value Y_{th7} corresponds to an offset of the straight line $L2$ shown in Fig. 7. In the third embodiment, if the peak luminance value
20 Y_{peak} is expressed by 8-bit data, since the maximum level is 255, the slope $K2$ is given by:

$$K2 = (255 - Y_{th7})/Y_{th8} \quad \dots (4)$$

If it is determined in step S201C that the luminance data fall within the peak image region that satisfies
25 inequality (3), a peak focus evaluation value is read

in step S220, and an AF process is executed in step S230.

On the other hand, if it is determined in step S201C that the luminance data do not satisfy inequality (3), it is checked in step S202C if the luminance data satisfy a second condition:

$$Y_{\text{peak}} > K3 \times Y_{\text{avr}} + Y_{\text{th9}} \quad \dots(5)$$

where the coefficient K3 is the ratio between the average luminance value Y_{avr} and luminance peak value Y_{peak} , and corresponds to the slope of a straight line L3 in Fig. 7. Also, the predetermined value Y_{th9} corresponds to an offset of the straight line L3 shown in Fig. 7. In the third embodiment, if the peak luminance value Y_{peak} is expressed by 8-bit data, since the maximum level is 255, the slope K3 is given by:

$$K3 = (255 - Y_{\text{th9}}) / Y_{\text{th10}} \quad \dots(6)$$

If this second condition is satisfied, it is also determined that the object is a peak image. A peak focus evaluation value is read in step S220, and an AF process is done using the peak focus evaluation value in step S230. If the second condition is not satisfied either, it is determined that the object is a normal image. An integrated focus evaluation value is read in step S210, and an AF process is done using the integrated focus evaluation value.

00649951.002900

As described above, according to the third embodiment, since the peak focus evaluation value is used in focus adjustment control for an object, such as a night scene, point light source, or the like (peak image) that poses a problem in the conventional integration AF method, since the peak focus evaluation value is used in focus adjustment control, accurate focus adjustment can be done even in a peak image. Since the integrated focus evaluation value is used in focus adjustment control for a normal image, stable focus adjustment can be assured.

[Fourth Embodiment]

The fourth embodiment of the present invention will be described below with reference to Figs. 8 to 11.

Fig. 8 is a block diagram showing an arrangement of a video camera system according to the fourth embodiment. The same reference numerals in Fig. 8 denote the same parts as in the arrangement shown in Fig. 1, and a detailed description thereof will be omitted.

The fourth embodiment is characterized in that the output from an iris position detector 250 for detecting the aperture value of the iris, and zoom position information (focal length information) are used in peak image discrimination. The zoom position information can be detected based on a signal such as a

stepping motor address for driving the zoom lens, which is output from the camera controller 240 to the zoom lens driver 111. On the other hand, the iris position detector 250 comprises a Hall element or the like, and
5 outputs a voltage corresponding to the aperture value of the iris to the camera controller 240.

The reason why information of the iris and focal length is added to peak image discrimination will be explained below.

10 In general, the field depth decreases with increasing focal length; the field depth increases with decreasing focal length. On the other hand, when the iris opens, the field depth decreases; otherwise, the focal depth increases. When the deviation of an object
15 from the in-focus position remains the same, the defocus level becomes large when the field depth is shallow; the defocus level is small when the field depth is deep.

Fig. 9 shows the relationship between the field
20 depth and integrated focus evaluation value in a peak image. As shown in Fig. 9, even in a peak image, when the field depth is deep, a peak of the integrated focus evaluation value appears at a correct in-focus position P0.

25 That is, even when it is determined based on the peak luminance value and average luminance value that

the object is a peak image, if the field depth is deep, focus adjustment can be done using the integrated focus evaluation value, depending on the focal length and iris.

5 In the fourth embodiment, the output from the iris position detector 250 and zoom position information (focal length information) are used in peak image discrimination for the aforementioned reasons.

Fig. 10 is a flow chart showing the focus adjustment process sequence according to the fourth embodiment.

 A peak luminance value Y_{peak} , average luminance value Y_{avr} , zoom position data, and iris position data are read (step S300). It is checked if the peak
15 luminance value Y_{peak} is higher than a predetermined value Y_{th11} (step S301).

 If it is determined that the peak luminance value Y_{peak} is lower than the predetermined value Y_{th11} , since the object is unlikely to be a high-luminance
20 object or point light source, it is determined that the object is a normal image irrespective of the iris and zoom states, and a process for reading an integrated focus evaluation value is executed (step S310). Then, focus adjustment is executed using the integrated focus
25 evaluation value (step S330). The reason why neither the iris nor zoom states are considered in the result

in step S301 is that such object with a low peak luminance value Ypeak is unlikely to be a peak image irrespective of the zoom and iris states.

00649051.082900

If it is determined in step S301 that the peak luminance value Ypeak is higher than the predetermined value Yth11, it is checked if the average luminance value Yavr is very low, i.e., if the average luminance value is lower than a predetermined value Yth12 (step S302). If the average luminance value Yavr is lower than the predetermined value Yth12, it is determined that the object is a peak image irrespective of the iris and zoom states, a peak focus evaluation value is read (step S320), and focus adjustment is done using the peak focus evaluation value (step S330). The reason why neither the iris nor zoom states are considered is that the object is highly likely to be a peak image irrespective of the zoom and iris states.

If it is determined in step S302 that the average luminance value Yavr is higher than the predetermined value Yth12, it is checked if the peak luminance value Ypeak is higher than a predetermined value Yth13 which is higher than the predetermined value Yth11 (step S303), and if the average luminance value Yavr is lower than a predetermined value Yth14 larger than the predetermined value Yth12 (step S304). If the peak luminance value Ypeak is lower than the predetermined

value Yth13 or if the average luminance value Yavr is higher than the predetermined value Yth14, it is determined that the object is a normal image. The process for reading an integrated focus evaluation value is executed in step S310, and focus adjustment is done using that integrated focus evaluation value in step S330.

If the peak luminance value Ypeak is higher than the predetermined value Yth13 and the average luminance value Yavr is lower than the predetermined value Yth14, the zoom position corresponding to the focal length is compared with a predetermined threshold value Zth1 to check if the zoom position (Zoom) is at the telephoto side with a long focal length (step S305). If the zoom position (Zoom) is smaller than the predetermined value Zth1, i.e., is not at the telephoto side, the process for reading an integrated focus evaluation value is executed in step S310, and focus adjustment is done using that integrated focus evaluation value in step S330.

If the zoom position is at the telephoto side, it is checked if the aperture value of the iris is larger than a predetermined threshold value Ith1 (step S306). If it is determined that the aperture value of the iris is smaller than the predetermined threshold value Ith1, the process for reading an integrated focus evaluation

09649951.002400

value is executed in step S310, and focus adjustment is done using that integrated focus evaluation value in step S330. On the other hand, if it is determined in step S306 that the aperture value of the iris is larger than the predetermined threshold value I_{th1} , since it is determined that the object is a peak image and the field depth is shallow, the process for reading a peak focus evaluation value is executed in step S320, and focus adjustment is done using the peak focus evaluation value in step S330.

Fig. 11 is an explanatory view showing the peak image discrimination scheme in the aforementioned sequence. In Fig. 11, a region with a shallow field depth, which satisfies the conditions in steps S305 and S306, corresponds to region B.

As described above, according to the fourth embodiment, since the peak focus evaluation value is used in focus adjustment control for an object such as a night scene, point light source, or the like (peak image) that poses a problem in the conventional integration AF method, accurate focus adjustment is done even in a peak image. Since the integrated focus evaluation value is used in focus adjustment control for a normal image, stable focus adjustment can be assured. Furthermore, since the fourth embodiment refers to the zoom and iris position information, an

object of a peak image, which is hard to discriminate using the integrated focus evaluation value, can be discriminated more accurately.

[Fifth Embodiment]

5 The fifth embodiment of the present invention will be described below with reference to Figs. 12 and 13.

 The fifth embodiment is characterized in that a peak image is discriminated based on a luminance signal
10 using a scheme different from that in the fourth embodiment.

 Fig. 12 is a flow chart showing the focus adjustment control sequence according to the fifth embodiment, and Figs. 13A and 13B are explanatory views
15 for explaining the peak image discrimination scheme. The processing sequence in steps S300 to S304 and steps S310 to S330 in Fig. 12 are the same as those in Fig. 10 explained in the fourth embodiment mentioned above.

20 If it is determined in step S304 that the average luminance value Y_{avr} is lower than the predetermined value Y_{th14} , it is checked in step S307 if the region of interest has a shallow field depth, i.e., if iris position data $Iris$ and zoom position data $Zoom$ satisfy:

25 $Iris > K4 \times Zoom + I_{th3} \quad \dots(7)$

where the coefficient K4 is the ratio between the zoom position data Zoom and iris position data Iris and corresponds to the slope of a straight line L4 shown in Fig. 13A, and Ith3 corresponds to an offset of the straight line L4. In the fifth embodiment, if the zoom position data and iris data are 8-bit data, since their maximum level is 255, the slope K4 is given by:

$$K4 = -(255 - Ith2)/(255 - Zth2) \quad \dots(8)$$

If inequality (8) holds, it is determined that the field depth is shallow. This state corresponds to region B in Fig. 13A.

If the conditions in steps S301 to S304 are satisfied, and it is determined in step S307 that the field depth is shallow, since it is determined that the object is a peak image, a process for reading a peak focus evaluation value is executed in step S320, and focus adjustment is done using that peak focus evaluation value in step S330.

Even when the conditions in steps S301 to S304 are satisfied to determine that the object is a peak image candidate, if the condition in step S307 is not satisfied, since it is determined that the object is a normal image, the process for reading the integrated focus evaluation value is executed in step S310, and an AF process is done using that integrated focus evaluation value in step S330.

As described above, according to the fifth embodiment, since the peak focus evaluation value is used in focus adjustment control for an object such as a night scene, point light source, or the like (peak image) that poses a problem in the conventional integration AF method, accurate focus adjustment is done even in a peak image. Also, since the fifth embodiment refers to the zoom and iris position information, an object of a peak image, which is hard to discriminate using the integrated focus evaluation value, can be discriminated more accurately.

Note that the field depth discrimination method is not limited to that shown in Fig. 13A. For example, two conditions (peak image region discrimination using straight lines L5 and L6) may be used, as shown in Fig. 13B.

[Other Embodiment]

Note that, in the aforesaid embodiments, signals to be used for focus adjustment are formed from a high-frequency component of image signals within the same area by performing two signal forming methods for focus adjustment. However, signals to be used for focus adjustment may be formed from a high frequency component of image signals in two different areas in this invention.

Further, one of the two signals obtained by the

two different signal forming methods for focus
adjustment is selectively used, however, both of the
two signals may be used by applying weights on these
two signals, and signals formed by 3 or more different
5 signal forming methods for focus adjustment may be used.

Further, in the above embodiments, the signal
forming methods for focus adjustment are changed
depending upon the result of photometry, however, other
operations for focus adjustment, such as operation
10 speed of lens for focus adjustment, may be changed.

Further, another evaluation photometry methods
different from those disclosed in the above embodiments,
and another signal forming method for focus adjustment
and focus adjustment method different from those
15 disclosed in the above embodiments may be used in this
invention.

Further, both of the focal length and a state of
an iris are taken into consideration upon peak image
judgement, however, one of these may be taken.

20 Further, software configuration and hardware
configuration disclosed in the above embodiments may be
exchanged.

It should be noted that the present invention
includes combinations of the aforesaid embodiments or
25 technical elements disclosed therein.

Further, the present invention also includes an

apparatus, formed by all or a part of the apparatuses disclosed in the embodiments of the present invention, which can be used either individually, with another apparatus, or within another apparatus.

5 Further, the present invention is applicable to: various types of cameras, such as an electronic camera for sensing a moving and/or a still image, a camera using a silver-halide film, a single-lens reflex camera, a leaf shutter camera, and a monitor camera; an image
10 sensing apparatus other than cameras; an image reading apparatus; an optical apparatus; and the like; an apparatus applied to cameras, an image sensing apparatus, an image reading apparatus, an optical apparatus, and the like; elements forming the foregoing
15 apparatuses; control method of the foregoing apparatuses; and a computer program product for providing the control method of the aforesaid processes to a computer system or apparatus (e.g., a personal computer), reading the program codes, by a CPU or MPU
20 of the computer system or apparatus, from the storage medium, then executing the program.

In this case, the program codes read from the storage medium realize the functions according to the embodiments, and the storage medium storing the program
25 codes constitutes the invention.

Further, the storage medium, such as a floppy

disk, a hard disk, an optical disk, a magneto-optical disk, CD-ROM, CD-R, a magnetic tape, a non-volatile type memory card, and ROM can be used for providing the program codes.

5 Furthermore, besides aforesaid functions according to the above embodiments are realized by executing the program codes which are read by a computer, the present invention includes a case where an OS (operating system) or the like working on the
10 computer performs a part or entire processes in accordance with designations of the program codes and realizes functions according to the above embodiments.

 Furthermore, the present invention also includes a case where, after the program codes read from the
15 storage medium are written in a function expansion card which is inserted into the computer or in a memory provided in a function expansion unit which is connected to the computer, CPU or the like contained in the function expansion card or unit performs a part or
20 entire process in accordance with designations of the program codes and realizes functions of the above embodiments.

 The present invention is not limited to the above embodiments and various changes and modifications can
25 be made within the spirit and scope of the present invention. Therefore to apprise the public of the

scope of the present invention, the following claims
are made.

0964951.082900

WHAT IS CLAIMED IS:

1. An apparatus comprising:

(A) a photo-receiving device that receives light from an object and converts the light into an image

5 signal; and

(B) a focus adjusting device that forms a first focus adjusting signal by performing a predetermined integration operation on a predetermined frequency component of the image signal obtained by said photo-receiving device and forms a second focus adjusting signal, different from said first focus adjusting signal, from a peak value of a predetermined frequency component of the image signal obtained by said photo-receiving device, said focus adjusting device applying
10 at least one of said first and second focus adjusting signals to focus adjustment on the basis of a luminous state of the object.

2. The apparatus according to claim 1, wherein said predetermined frequency component is a frequency
20 component on a predetermined high frequency side.

3. The apparatus according to claim 1, wherein said focus adjusting device judges the state of the luminous state of the object on the basis of the image signal obtained by said photo-receiving device.

25 4. The apparatus according to claim 1, wherein said focus adjusting device applies at least one of said

09649951.002900
first and second focus adjusting signals to the focus adjustment on the basis of a luminous distribution state of the object.

5. The apparatus according to claim 1, wherein said
5 focus adjusting device applies said second focus adjusting signal to the focus adjustment in a case where an object image is judged as a peak image on the basis of the luminous state of the object.

6. The apparatus according to claim 5, wherein said
10 focus adjusting device applies said first focus adjusting signal to the focus adjustment in a case where an object image is not judged as a peak image on the basis of the luminous state of the object.

7. The apparatus according to claim 1, wherein said
15 focus adjusting device applies said first focus adjusting signal to the focus adjustment in a case where an object image is not judged as a peak image on the basis of the luminous state of the object.

8. The apparatus according to claim 1, wherein said
20 focus adjusting device forms said first focus adjusting signal by integrating a predetermined peak value of said predetermined frequency component of the image signal obtained by said photo-receiving device.

9. The apparatus according to claim 8, wherein said
25 focus adjusting device forms said second focus adjusting signal by obtaining said peak value without

performing said predetermined integration operation on
said predetermined frequency component of the image
signal obtained by said photo-receiving device.

10. The apparatus according to claim 8, wherein said
5 focus adjusting device forms said second focus
adjusting signal from a peak value of the predetermined
frequency component of the image signal obtained by
said photo-receiving device.

11. The apparatus according to claim 1, wherein said
10 focus adjusting device forms said second focus
adjusting signal by obtaining said peak value without
performing said predetermined integration operation on
the predetermined frequency component of the image
signal obtained by said photo-receiving device.

15 12. The apparatus according to claim 1, wherein said
focus adjusting device forms said second focus
adjusting signal from a single peak value of a
predetermined frequency component of the image signal
obtained by said photo-receiving device.

20 13. The apparatus according to claim 1, wherein said
focus adjusting device judges the luminous state of the
object on the basis of a peak value of luminance of the
object and an average value of the luminance of the
object.

25 14. The apparatus according to claim 1, wherein said
focus adjusting device applies at least one of said

first and second focus adjusting signals to the focus adjustment in consideration of a state of a focal length.

15. The apparatus according to claim 14, wherein said
5 focus adjusting device applies at least one of said first and second focus adjusting signals to the focus adjustment in consideration of a state of an iris.

16. The apparatus according to claim 1, wherein said
focus adjusting device applies at least one of said
10 first and second focus adjusting signals to the focus adjustment in consideration of a state of an iris.

17. The apparatus according to claim 1, wherein said
focus adjusting device changes a focus adjusting signal to be applied to the focus adjustment from said second
15 focus adjusting signal to said first focus adjusting signal as depth of field is deepened by at least one of a focal length and an iris.

18. The apparatus according to claim 1, wherein said apparatus comprises an image sensing apparatus.

20 19. The apparatus according to claim 1, wherein said apparatus comprises a camera.

20. The apparatus according to claim 1, wherein said apparatus comprises an optical device.

21. An apparatus comprising:

25 (A) a photo-receiving device for receiving light from an object; and

00649931 082900

(B) a focus adjusting device performing an operation for focus adjustment, said focus adjusting device performing the operation depending upon determination whether or not an object image has a luminous state judged as a peak image on the basis of a photo-received signal from said photo-receiving device.

22. The apparatus according to claim 21, wherein said focus adjusting device forms a signal for the focus adjustment on the basis of the photo-received signal from said photo-receiving device.

23. The apparatus according to claim 22, wherein said focus adjusting device forms a signal for the focus adjustment by detecting sharpness of an object image.

24. The apparatus according to claim 21, wherein said focus adjusting device forms a signal for the focus adjustment by detecting sharpness of an object image.

25. The apparatus according to claim 21, wherein said apparatus comprises an image sensing apparatus.

26. The apparatus according to claim 21, wherein said apparatus comprises a camera.

27. The apparatus according to claim 21, wherein said apparatus comprises an optical device.

28. A focus adjusting method comprising:
converting light from an object into an image signal, forming a first focus adjusting signal by performing a predetermined integration operation on a

predetermined frequency component of the image signal,
forming a second focus adjusting signal, different from
said first focus adjusting signal, from a peak value of
a predetermined frequency component of the image signal,
5 applying at least one of said first and second focus
adjusting signal to focus adjustment on the basis of a
luminous state of the object.

29. A focus adjusting method comprising:
performing an operation for focus adjustment
10 depending upon determination whether or not an object
image has a luminous state judged as a peak image on
the basis of a photo-received signal of light of the
object.

30. A computer program product comprising:
15 converting light from an object into an image
signal, forming a first focus adjusting signal by
performing a predetermined integration operation on a
predetermined frequency component of the image signal,
forming a second focus adjusting signal, different from
20 said first focus adjusting signal, from a peak value of
a predetermined frequency component of the image signal,
applying at least one of said first and second focus
adjusting signal to focus adjustment on the basis of a
luminous state of the object.

31. The computer program product according to claim 30, wherein said computer program product comprises a storage medium.

32. A computer program product comprising:

- 5 performing an operation for focus adjustment depending upon determination whether or not an object image has a luminous state judged as a peak image on the basis of a photo-received signal of light of the object.

- 10 33. The computer program product according to claim 32, wherein said computer program product comprises a storage medium.

ABSTRACT OF THE DISCLOSURE

An automatic focus adjustment device has an image sensing element for converting an object optical image into an electrical signal, and outputting an image
5 signal, a filter for extracting high-frequency components of the image signal obtained by the image sensing element, an integrator for integrating the high-frequency components extracted by the filter and outputting an integrated value, a peak hold circuit for
10 detecting and outputting a peak value of the high-frequency components extracted by the filter, a discrimination unit for discriminating the luminance distribution of the object optical image, and a focus adjustment unit for making focus adjustment using one
15 of the integrated value output from the integrator and the peak value output from the peak hold circuit in accordance with the discrimination result.

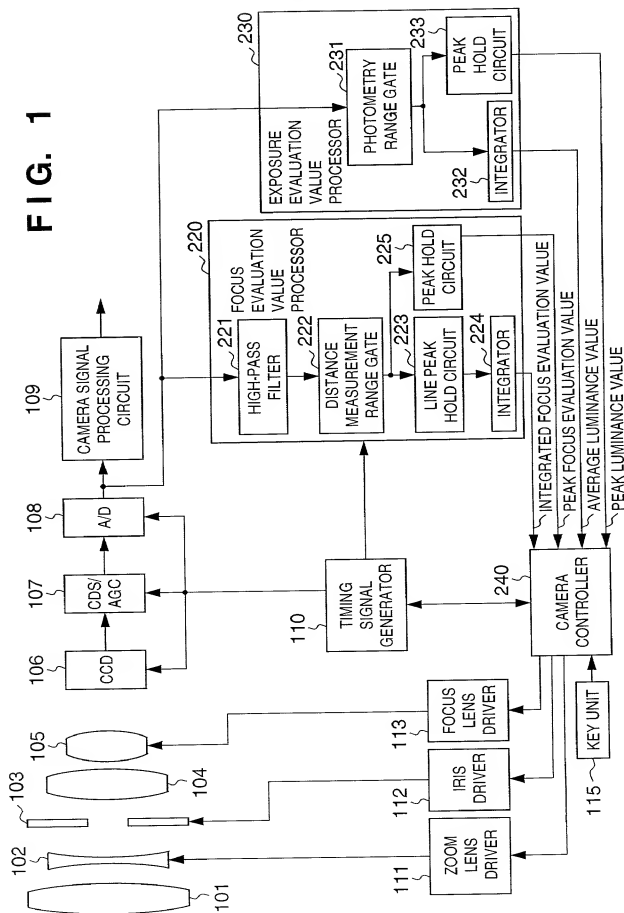


FIG. 2

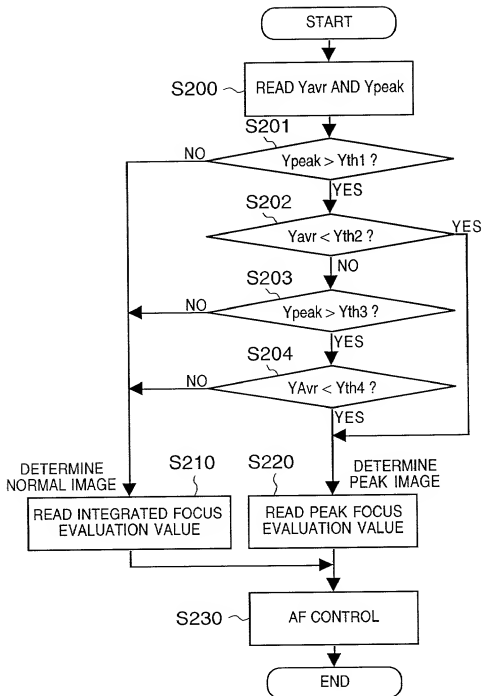


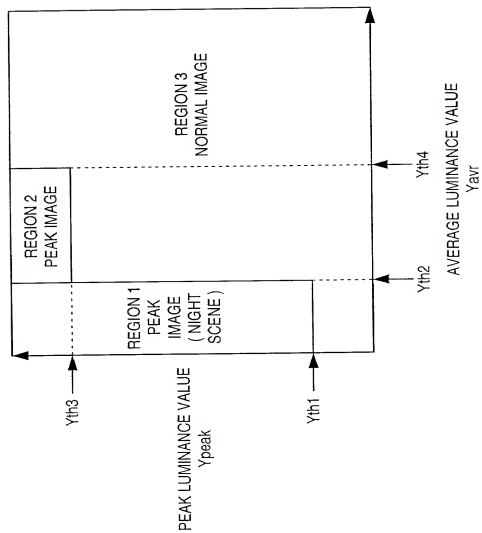
FIG. 3

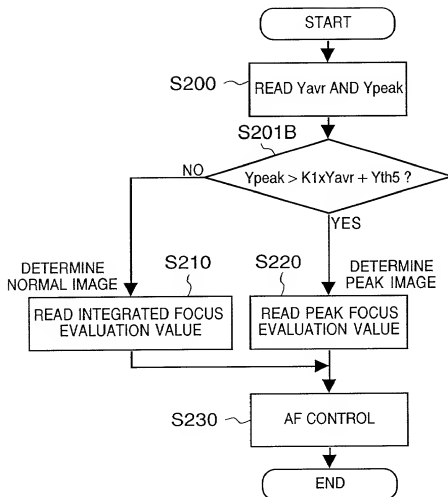
FIG. 4

FIG. 5

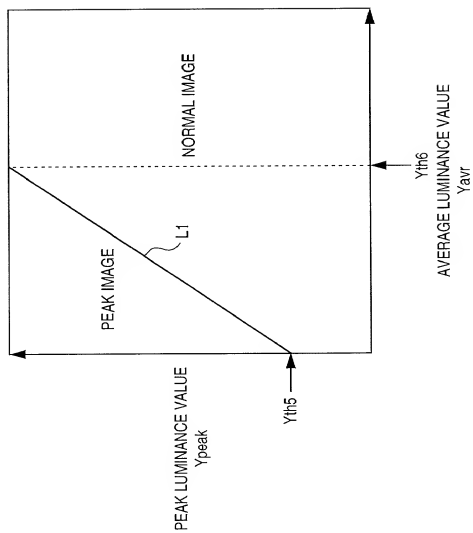


FIG. 6



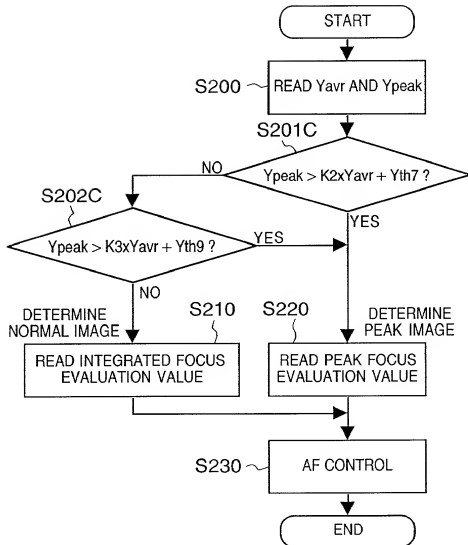


FIG. 7

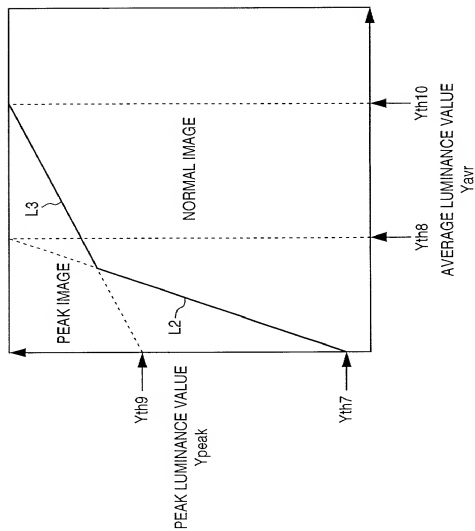

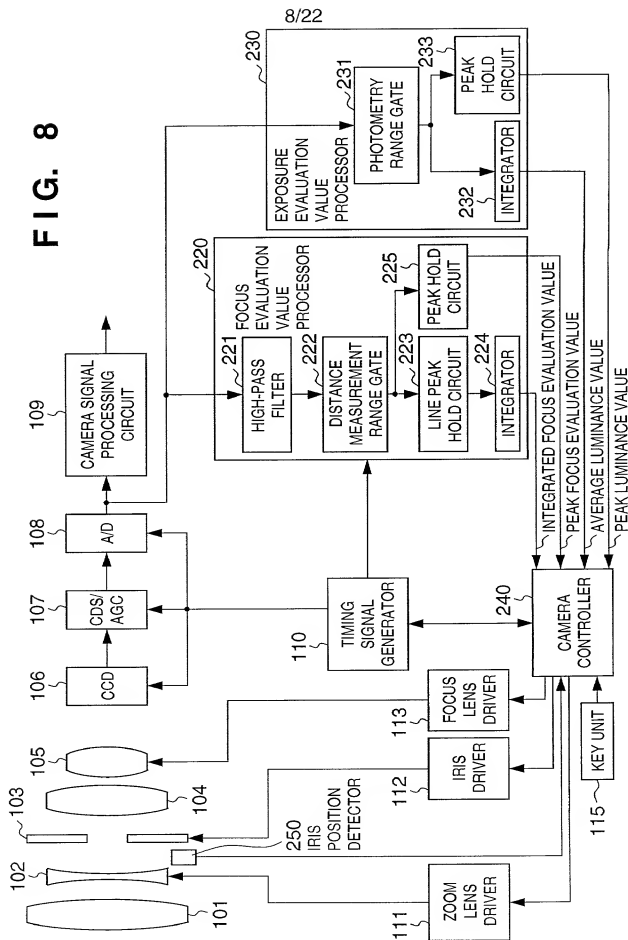

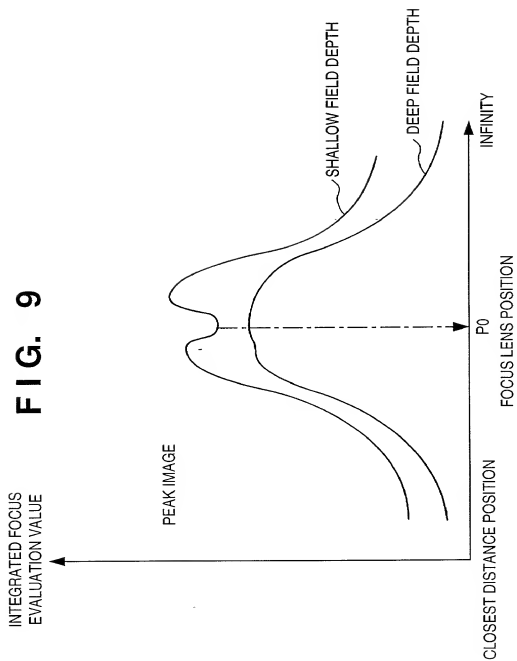


FIG. 10

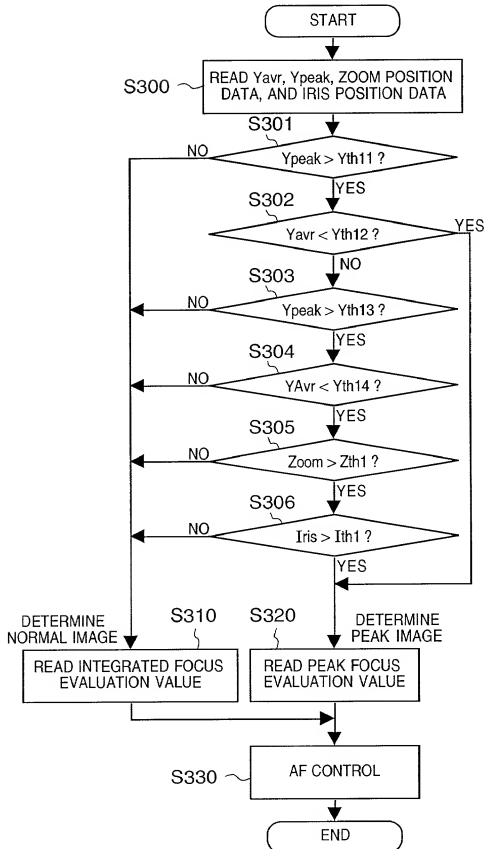


FIG. 11

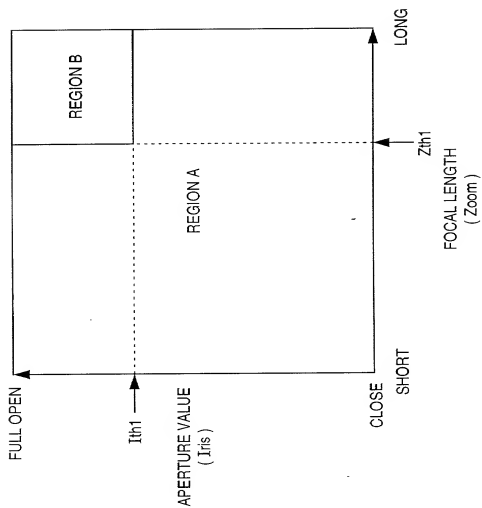


FIG. 12

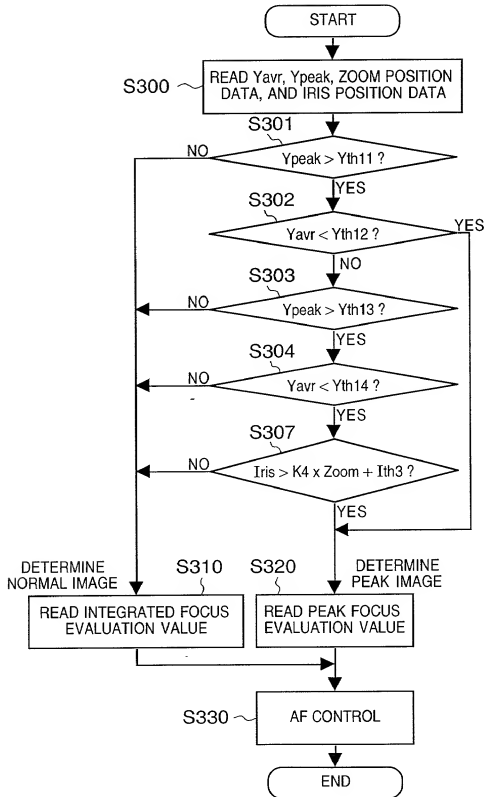


FIG. 13A



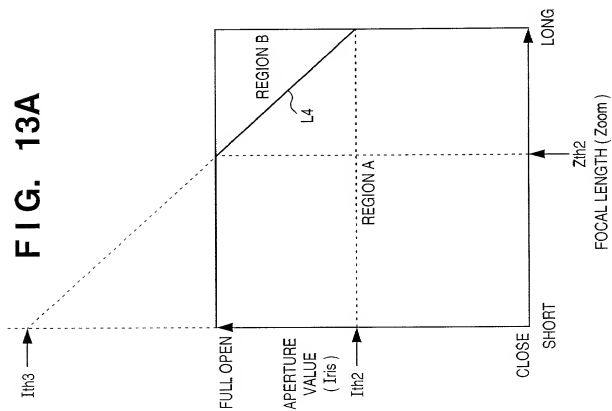



FIG. 13B

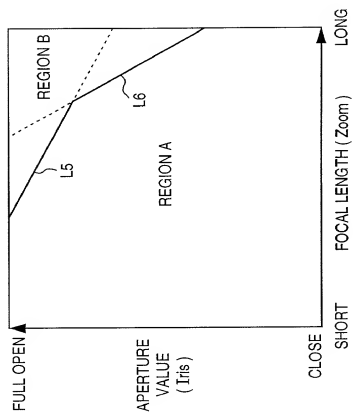

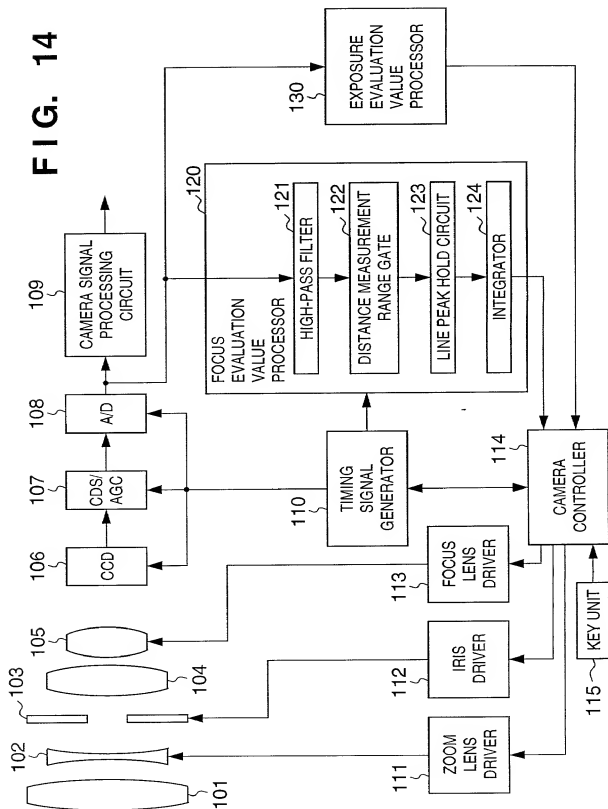

INTEGRATED FOCUS
EVALUATION VALUE

FIG. 15

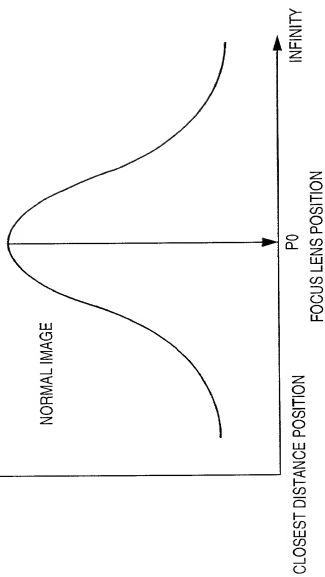

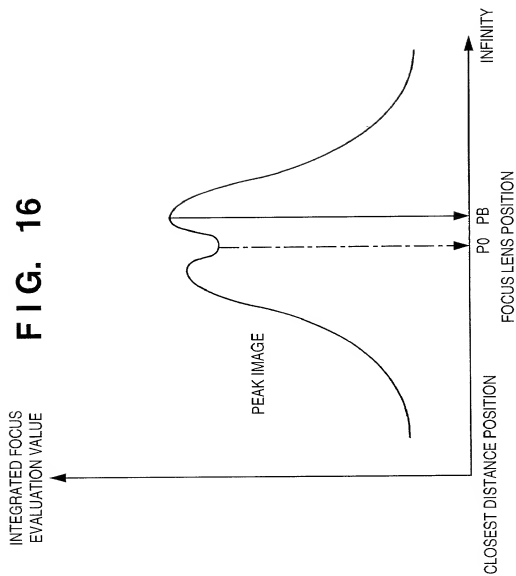





FIG. 17

FIG. 18

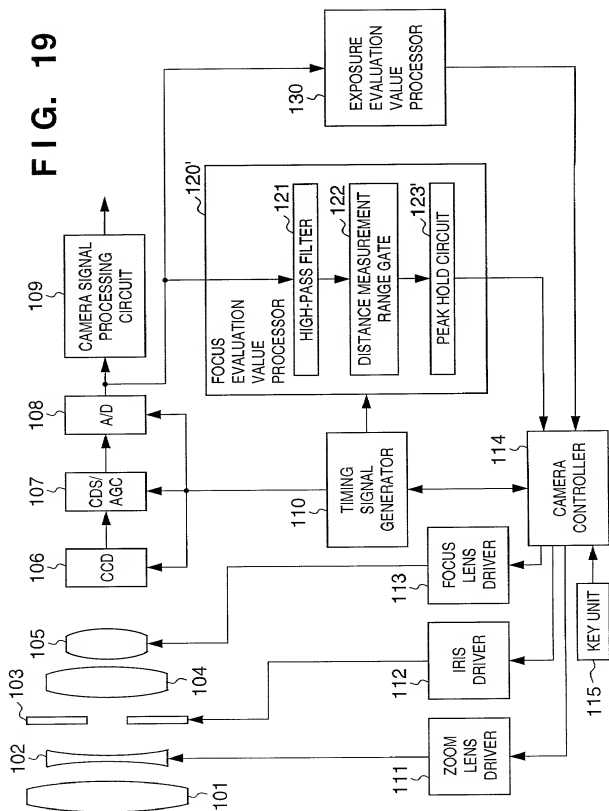

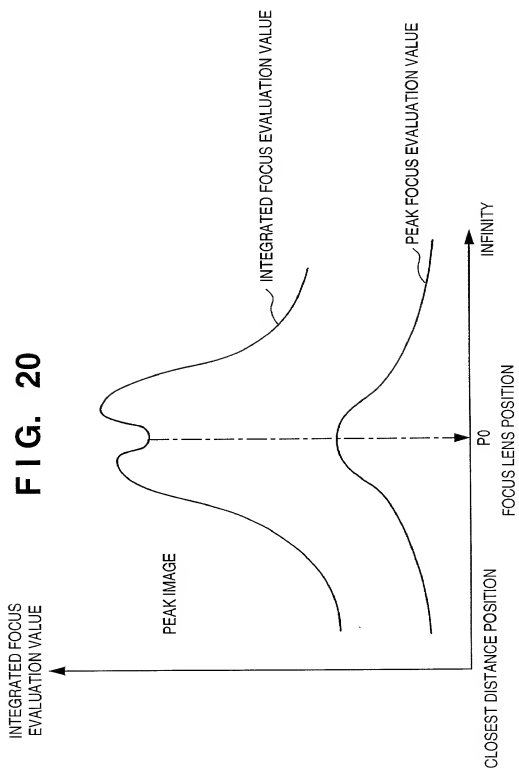


FIG. 21A




FIG. 21B




FIG. 22A




FIG. 22B

